

Application Setup

- [Prowlarr, Radarr & Sonarr](#)
- [qBittorrent](#)
- [Jellyfin & Jellyseerr](#)


Prowlarr, Radarr & Sonarr

Prowlarr

After installation and starting up, you open a browser and go to `http://{your_ip_here}:9696`

Adding Indexer

The first thing to set up in Prowlarr is indexers. You will add each indexer individually to Prowlarr.

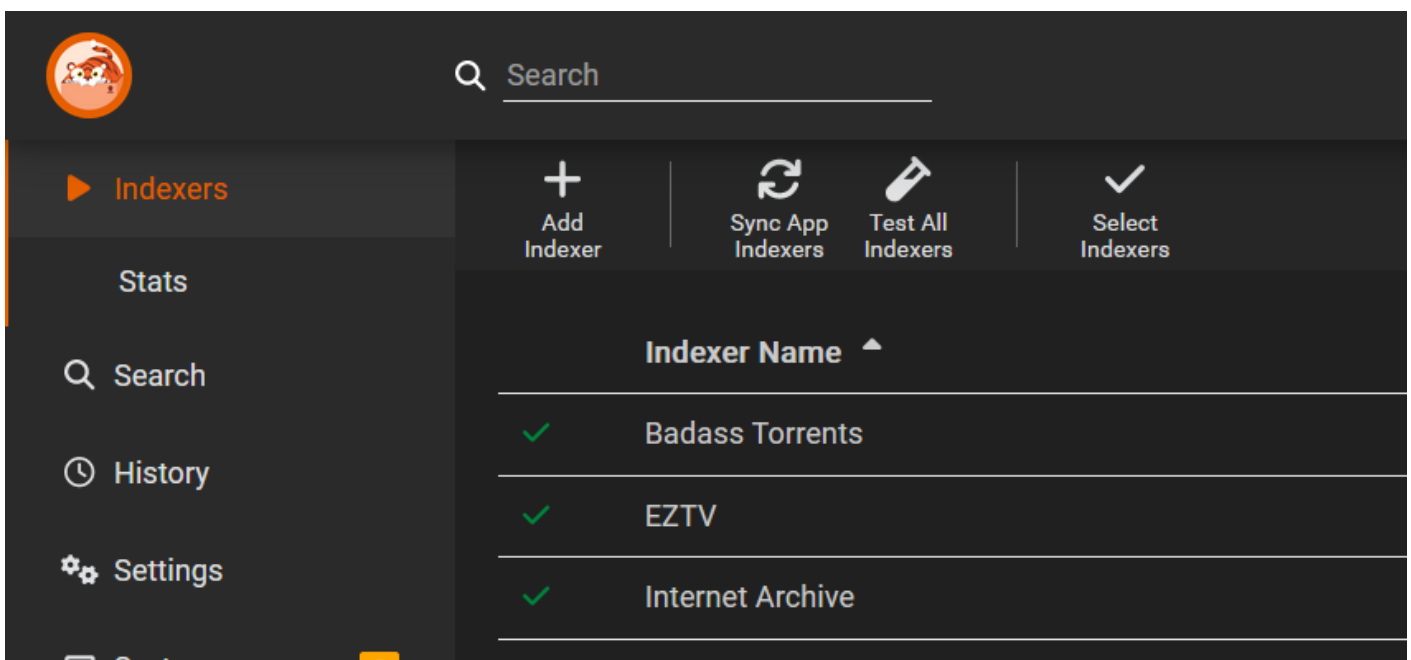

Click on "Add Indexer"

There you can filter for several indexers like pirate bay etc. It's important to take only them with **Privacy "Public"** for the private ones you need an invite.

Add Indexer

Search indexers

Protocol

Language

Privacy

Categories

en-US

Public

Movies

Prowlarr supports many indexers in addition to any indexer that uses the Newznab/Torznab standard using 'Generic Newznab' (for usenet) or 'Generic Torznab' (for torrents). Search & Select your indexer from below.

Protocol	Name ^	Language	Description	Privacy	Categories
torrent	1337x	en-US	1337X is a Public torrent site that offers verified torrent downloads	Public	Console Movies Audio PC TV XXX Books Other
torrent	Badass Torrents	en-US	Badass Torrents is a Public torrent site for MOVIES / TV / GENERAL	Public	Movies Audio PC TV XXX Books Other
torrent	Bangumi Moe	en-US	Bangumi Moe is a Public torrent site for ANIME	Public	Console Movies Audio TV Books Other
torrent	BitSearch	en-US	BitSearch is a Public torrent meta-search engine	Public	Movies Audio PC TV XXX Books Other

Once you choose one, Test the connection.

If the connection is successful you can add the indexer to your list.

Add Indexer - Cardigann (bitsearch)



Name

BitSearch



Enable



Redirect



Redirect incoming download request for indexer and pass the grab directly instead of proxying the request via Prowlarr

Sync Profile

Standard



App profiles are used to control RSS, Automatic Search and Interactive Search settings on application sync

Base Url



Select which baseurl Prowlarr will use for requests to the site

Query Limit



The number of max queries as specified by the respective unit that Prowlarr will allow to the site

Grab Limit



The number of max grabs as specified by the respective unit that Prowlarr will allow to the site

Limits Unit

Day

(0)



The unit of time for counting limits per indexer

Apps Minimum Seeders



Minimum seeders required by the Applications for the indexer to grab. empty is Sync profile's default



Test

Cancel


Save

Here are some Indexers which I use:

Indexer Name ^	Protocol	Privacy	Priority
✓ Badass Torrents	torrent	Public	25
✓ EZTV	torrent	Public	25
✓ Internet Archive	torrent	Public	25
✓ LimeTorrents	torrent	Public	25
✓ The Pirate Bay	torrent	Public	25
✓ Torlock	torrent	Public	25
✓ TorrentGalaxy	torrent	Public	25
✓ YourBittorrent	torrent	Public	25

Adding Radarr & Sonarr

After you've added your indexers, we then connect Prowlarr to your other apps. Click on Settings => Apps, and then click the + to add a supported app

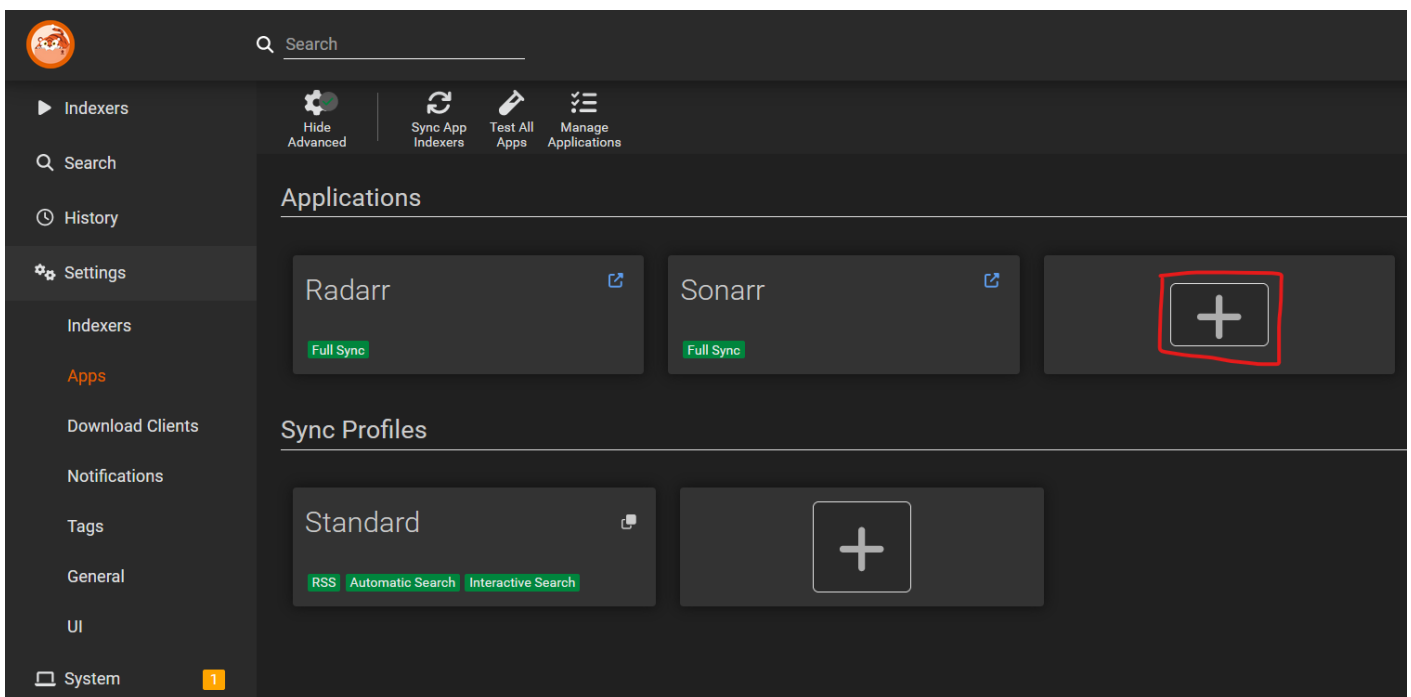

We need to add Radarr & Sonarr:

For each app please add following parameters:

- Radarr / Sonarr Server: <http://123.456.789.111:7878> (on whatever port your app is running)
- API Key: In the "Settings -> General -> API Key" of each Radarr/Sonarr instance
- Test the connection. If it's green its all good :)

Name

Radarr

Sync Level

Full Sync

Add and Remove Only: When indexers are added or removed from Prowlarr, it will update this remote app.

Full Sync: Will keep this app's indexers fully in sync. Changes made to indexers in Prowlarr are then synced to this app. Any change made to indexers remotely within this app will be overridden by Prowlarr on the next sync.

Tags

Sync Indexers to this application that have no tags or that have 1 or more matching tags

Tags should be used with caution, they can have unintended effects. An app with a tag will only sync with indexers having the same tag.

Prowlarr Server

http://192.168.1.228:9696

Prowlarr server URL as Radarr sees it, including http(s)://, port, and urlbase if needed

Radarr Server

http://192.168.1.228:7878

URL used to connect to Radarr server, including http(s)://, port, and urlbase if required

API Key

8449298e704a45b38bee297154e5d1b3

The ApiKey generated by Radarr in Settings/General

Sync Categories

Movies Movies/Foreign Movies/Other Movies/SD ...

Only Indexers that support these categories will be synced

Delete



Test


Cancel

Save

Once this is done we mainly finished Prowlarr.


Radarr

After installation and starting up, you open a browser and go to `http://{your_ip_here}:7878`

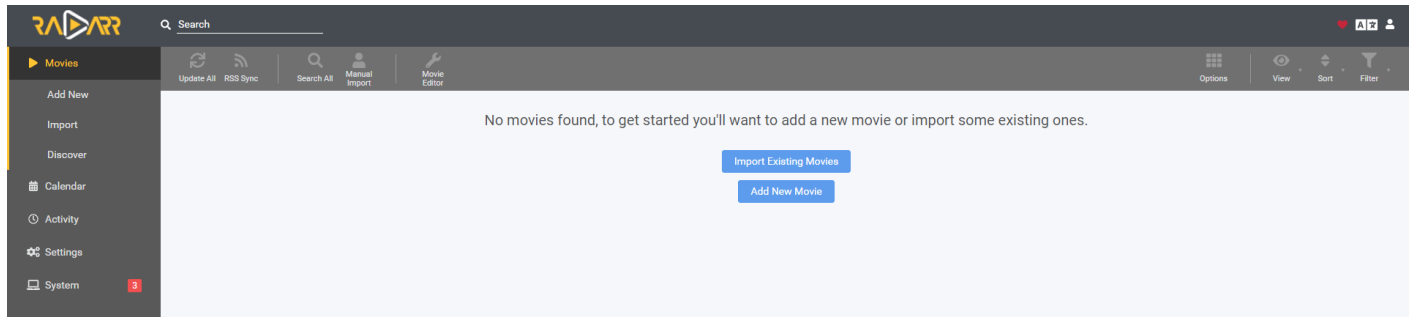

Media Management

First we change some setting in the media management. Settings -> Media Management

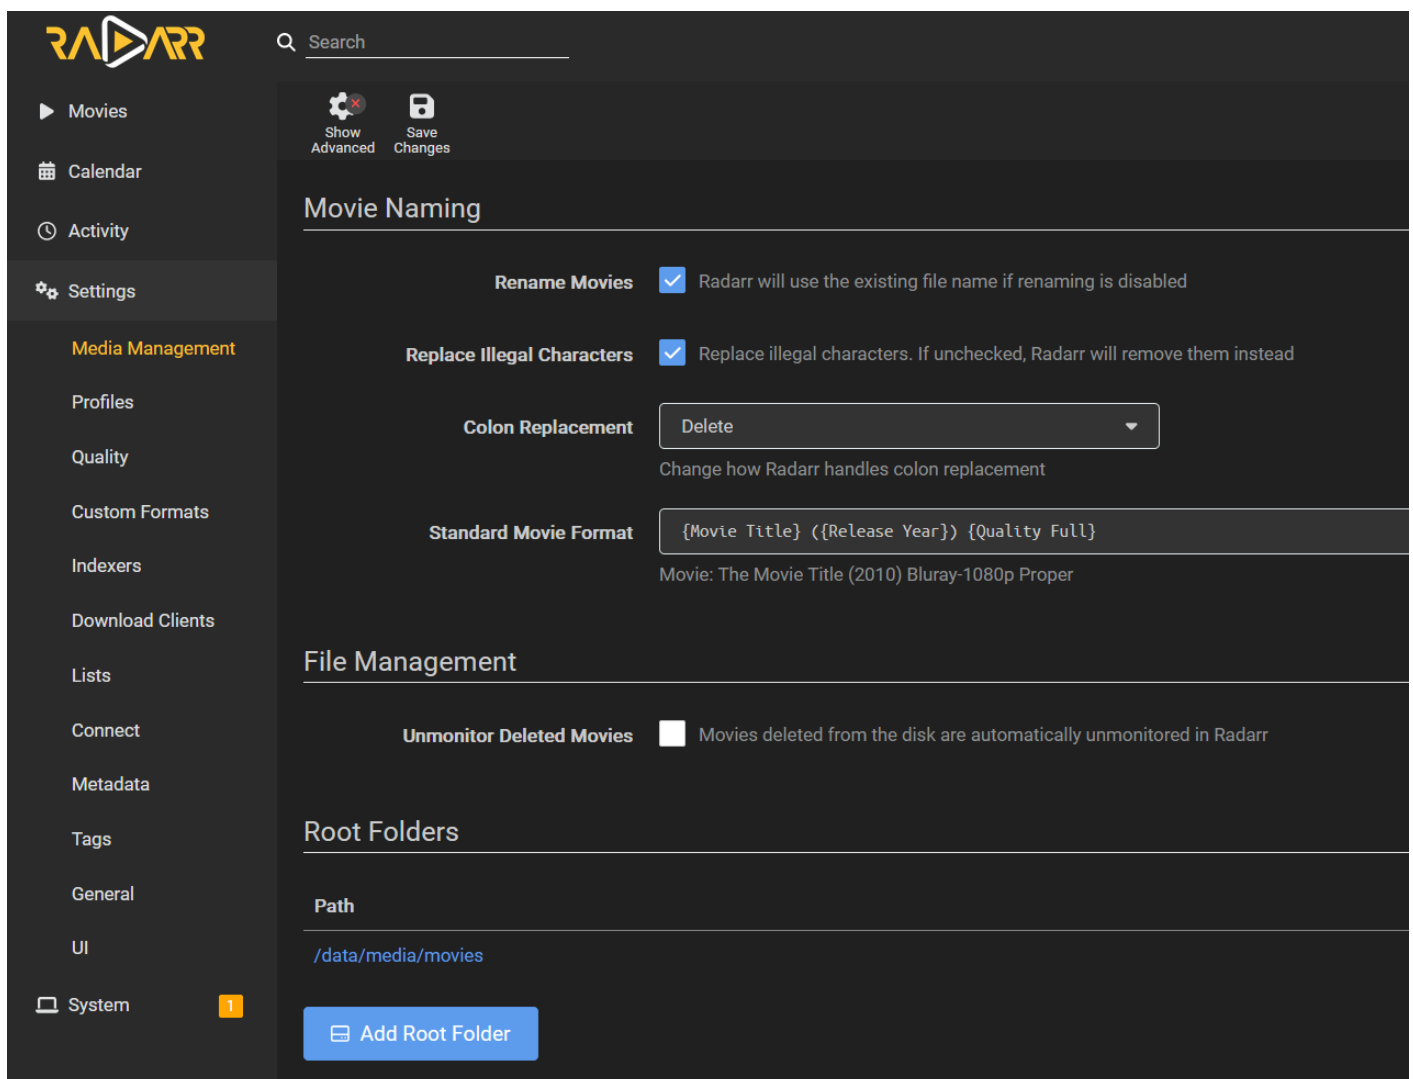


Make sure you ticked "Rename Movies" & "Replace Illegal Characters". Below you can define how the Movie Title format should look like.

Add as well the path where all movies should be stored. This will be the **same path as Jellyfin uses** for the media.

Download Clients

Next we define the download client. Settings -> Download Clients

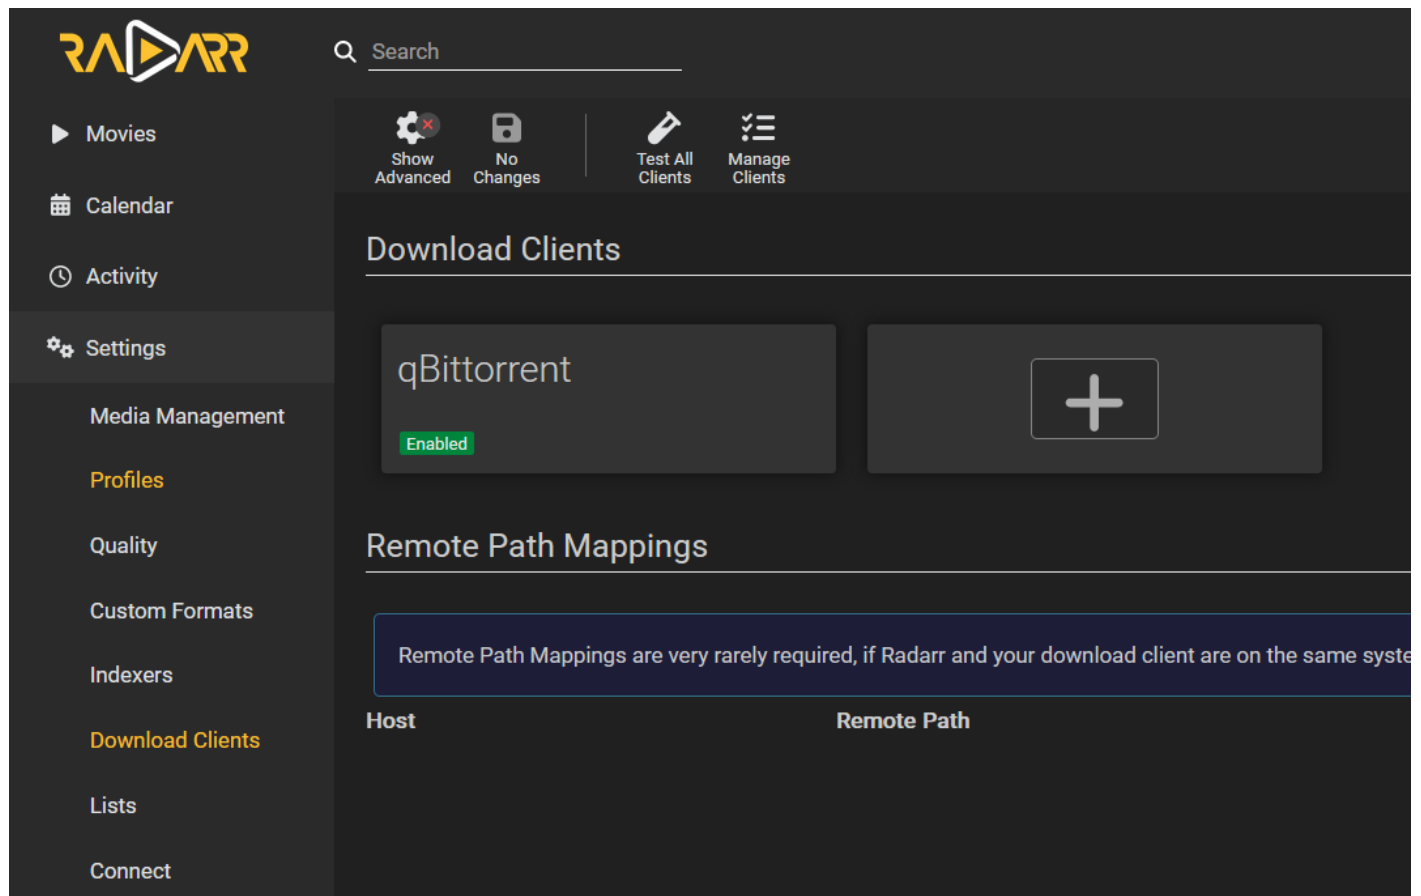

Click on the + and to add a new qBittorrent client.

qBittorrent

Jellyfin & Jellyseerr